


EM211 DIO board

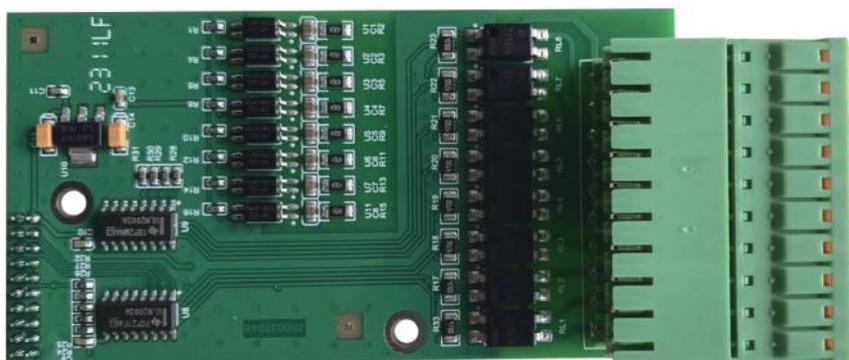

Specifications

DIO board	Feature	Terminal mark	Terminal function description	Electrical performance	
Input/output	Extended input/output signal interface	COM	Extended input Com	Input point mode: DC Input voltage: 24VDC Input current: 5mA	
		IN5	Extended input 5		
		IN6	Extended input 6		
		IN7	Extended input 7		
		IN8	Extended input 8		
		IN9	Extended input 9		
		IN10	Extended input 10		
		IN11	Extended input 11		
		IN12	Extended input 12		
		COM	Extended input Com	Input point mode: DC Current: 2A/1point Voltage: 250VAC,30VDC Maximum load: 10W	
		COM	Extended output Com		
		OUT5	Extended output 5		
		OUT6	Extended output 6		
		OUT7	Extended output 7		
		OUT8	Extended output 8		
		OUT9	Extended output 9		
		OUT10	Extended output 10		
		OUT11	Extended output 11		
		OUT12	Extended output 12	Input point mode: transistor Current: 0.2A/1point Voltage: 30VDC Maximum load: 10W	
COM4	Extended output Com				